

# MARTLET MI-2S

LONG ENDURANCE MINI UAS

**HEIGHT**  
TECHNOLOGIES



DATASHEET





# ACTION AERIAL INTELLIGENCE

The MI-2S is a portable long endurance multirotor, ideal for monitoring high-risk situations where decisions need to be made quickly. The system is designed to make minimal noise for covert day and night observation.


The frame and propellers of the Martlet MI-2S are all built with aviation-grade carbon composite, kevlar, and glass fiber materials - because every 1% counts..

# AIRCRAFT OPERATING ENVELOPE

FORM FACTOR	L	W	H	
Frame size	40	40	15	cm
Propeller size	18.5			inch
Empty weight	1600			grams
Weight with battery	2995			grams
Max take-off weight	3995			grams

## ENVIRONMENT

Operational temperature	-20 – +50	°C
Precipitation	IP54	

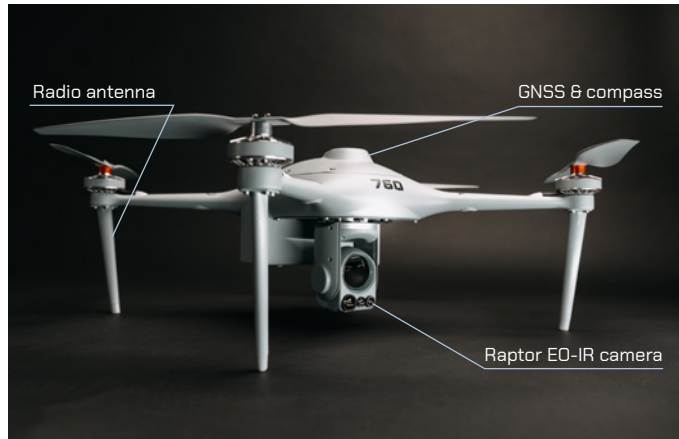

Copyright © 2024 Height Technologies. All rights reserved.

## SPEED

Max wind speed	30	knots
Max airspeed	40	knots
Max speed	21	m/s
Cruising speed	10	m/s
Ascent speed	3.5	m/s
Descent speed	3	m/s

## ENDURANCE MAX & WITH PAYLOADS

Max flight time	60	min
Raptor	55	min

## PERFORMANCE & RANGE

Covert distance (sound)	200*	meter
Typical deployment time	< 2	min
Typical radio range (RLoS)	20	km
Theoretical range	100	km

\* At 120m AGL

## ALTITUDE LIMITS

AMSL	3500	meter
AGL	500	meter

# MARTLET GROUND CONTROL STATION

## SPECIFICATIONS

<b>Weight</b>	927 grams
<b>Dimensions (LxWxH)</b>	25.6 x 14 x 6.8 cm
<b>Connections</b>	USB-C 3.0, Nett Warrior EUD compatible
<b>Radio Options</b>	Silvus, Microhard, Doodle Labs, and more
<b>Operating Software</b>	Android 11 (Windows 11 on request)
<b>CPU</b>	Qualcomm® SDM660 2.2/1.843GHz
<b>Memory</b>	4GB (LPDDR4)
<b>Display</b>	7" WXGA 1280 x800 px, 750nit
<b>Certification</b>	MIL-STD-810-H
<b>Compliance</b>	CE, ROHS compliant
<b>Precipitation</b>	IP65
<b>Operational Temperature</b>	-20 – +50 °C

## MARTLET GCS

The Martlet Ground Control Station (GCS) is a durable, portable control unit equipped with MIL-STD components. Designed for single-operator use in any environment or weather condition and interoperable on all Martlet UAV systems. With Nett Warrior compatibility and Swappable Radio Modules (SRM), this tactical controller provides exceptional interoperability and radio-agnostic capabilities. In addition to its internal battery, two swappable batteries enable continuous operation.

## DATALINK SPECIFICATIONS

Encryption	AES256 / AES128	bit
Frequency range	2025 – 2500 (+5000 – 5200)	MHz
Max transmitting power	500	mW
Max transmitting distance	15	km
Latency	0.1	sec

## HT-SDR DATALINK MODULE

As standard, the Martlet sUAS are equipped with the in-house developed software defined digital datalink has the ability to use a predefined custom encryption-key, to automatically “hop” between frequencies and to operate in a wide range of user-definable NATO harmonized frequency ranges:  
2.0 – 2.5 GHz + 5.0 – 5.2 GHz (OPTIONAL)



## MARTLET SOFTWARE CAPABILITIES

### TARGET ACQUISITION / POINTS OF INTEREST

The software shows the real-time camera footprint on the map, calculates the location of the CAM-footprint and POI in **UTM**, **MGRS** and **GEO** coordinates and can measure various distances that could be valuable to the men on the ground. It enables operators and first responders to maximise situational awareness through advanced aerial intelligence. The Martlet GCS software can load multiple custom (military) maps, giving operators better access to more actionable intelligence when interpreting their live video feed with one of their preloaded maps.

### GNSS-DENIED FLIGHTS / DEAD RECKONING

In case of loss of GNSS/GPS or during a jamming or spoofing attack, the system automatically initiates Dead Reckoning Mode, enabling it to fly in GNSS-denied areas.



Copyright © 2024 Height Technologies. All rights reserved.

### BINGO FOR MAXIMAL FOCUS

The pilot has a perfect overview of all important indicators for a safe flight. The Bingo parameter calculated the remaining mission time (time remaining before the UAV needs to go back to the home-point). This allows the pilot to fully focus on the mission. The system always ensures a timely flight back to the desired landing location.



## MI-2S PAYLOAD OPTIONS

### MICRO STABILIZED GIMBALED CAMERAS

The Raptor is part of our family of dual EO/IR sensors, leaders in micro-stabilised gimbal mounted cameras. Built for long-range observation, the Raptor dual EO/IR payload offers HD image quality and unmatched X80-fold zoom to capture detailed images such as number plates and faces.


### GEOLOCATION

The POI function captures the position of the camera, and its line of sight, and extracts the location of observed objects with < 5 meter accuracy to enhance real-time intelligence.



### RAPTOR

EO resolution	1280 x 720 px
EO zoom	x40 + x2 (total x80) continuous
EO HFOV	60° WFOV – 1.5° NFOV – 0.75° DFOV
LWIR resolution	1280 x 720 px
LWIR zoom	x8 continuous
LWIR HFOV	17.5° WFOV – 2.2° DFOV
Optional	Laser Illuminator (1m spot at 1km)

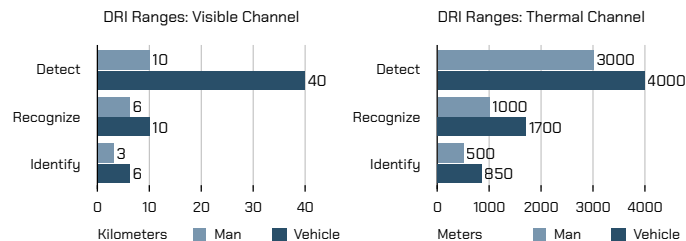

Customized payload options available.  
Contact us for your special project.



## MARTLET MI-2S



## MARTLET MI-2S | SYSTEM CONTENT

### TROLLEY TRANSPORT CASE



### IN THE CASE

- Martlet MI-2S UAV system
- Martlet 17" propeller set
- Martlet Ground Control Station
- Tripod for Martlet Ground Control Station
- 2x Flight batteries (18000 mAh | 22.2 V)
- UN3840 certified flight battery case (fits 2x flight batteries)
- Battery charger kit
- Toolbox





# MARTLET MI-2S | MADE FOR ISTAR

HEIGHT TECHNOLOGIES | SEE WITHOUT BEING SEEN 



CLASS-I MINI UAS  
MADE FOR ISTAR OPERATIONS

**HEIGHT**  
TECHNOLOGIES

SEE WITHOUT  
BEING SEEN



**CONTACT**

TEL: +31 (0)344 607968  
MAIL: [info@heighttechnologies.com](mailto:info@heighttechnologies.com)  
WEB: [heighttechnologies.com](http://heighttechnologies.com)  
OFFICE: De Iepenwei 5D ■ 4191PD ■ Geldermalsen ■ [The Netherlands](#)

